




## FELCO 600 - Green

Pull-stroke Pruning saw - Folding pull-stroke pruning saw - Blade 16 cm (6.3 in.)

Designed in Switzerland by FELCO, Made in South Korea, Guaranteed FELCO Quality, PATENT NO: US D500,240 S

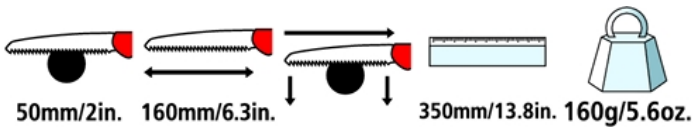

- > **Reliable:** rust resistant chromed blade made of steel / impulse heat treatment of the teeth / clean, precise cut / parts can be replaced
- > **Efficient:** conical blade shape that cuts without clogging / the set and shape of the teeth prevents sap build-up / maintenance free
- > **Ergonomic:** comfortable non-slip handle



## RECOMMENDED FOR

Our recommendation (★ = Recommended, ★★ = Strongly recommended, ★★★ = Best fit)

Viticulture	★★★
Arboriculture	★★★
Horticulture	★★★
Parks and Gardens	★★★
Nursery	★★★
Small hand	★★★
Average-sized hand	★★★
Large hand	★★★
Left-handed	★★★

---

## THE POINTS OF EXCELLENCE



### **Pull-stroke**

The pull-stroke technique reduces effort and eliminates the risk of the blade pig-tailing.



### **Anticorrosion**

Rust resistant chromed blade made of steel.



### **Cutting edge durability**

Teeth are submitted to the impulse treatment in order to increase the durability of the saw's cutting edge.



### **Teeth geometry**

The teeth geometry is particularly suited for cutting woodland. Improved clearance of metal shavings and a softer bite in order to avoid arm injuries/aches and pains.



### **Ergonomics**

The ergonomic, non-slip handle provides good handling.



### **Folding saw**


The folding saw can be carried in a pocket.







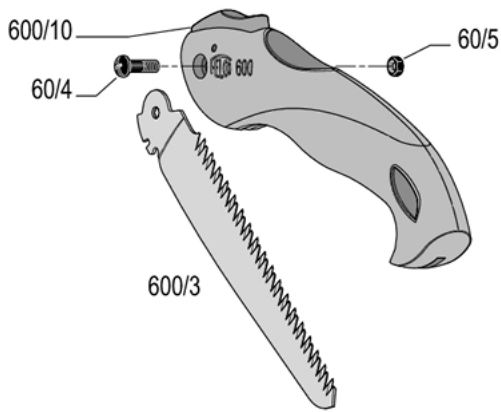

**ACCESSORIES**



FELCO 980  
 Maintenance product  
 Spray

**SPARE PARTS**



FELCO	REF.	Designation	Composition	UCC Barcode
	600/3	Blade	1x 600/3	 7 83929 40064 8
	60/4	Screw	1x 60/4	 7 83929 40224 6
	60/5	Nut	1x 60/5	 7 83929 40225 3
	600/10	Closing catch	1x 600/10	 7 83929 40226 0

## PARTS REPLACEMENT



### Changing the blade

If the tool is no longer cutting properly, it is advisable to change it.

---